



TECHNICAL DATA SHEETS

UTM GUN CONVERSION TDS MASTER LIST

Page 1 of 1



Navigation: To jump directly to a specific TDS, click on the required page in the Table of Contents.

Table of Contents

AR-15 Platform

TDS_01-2523 AR-15 (TSK)	1
TDS_01-2519 AR-15 (TSK)	2
TDS_01-2599 AR-15 (TSK)	3

Pistols

TDS_01-2988 Beretta 92F (TSK)	4
TDS_01-2978 Glock 17 (TSK)	5
TDS_01-2983 H&K USP Compact (TSK)	6
TDS_01-2994 Sig 226 (TSK)	7
TDS_01-3286 Sig 226_40Cal (TSK)	8
TDS_01-2993 Sig 229 (TSK)	9
TDS_01-3287 S&W M&P_40Cal (TSK)	10



TECHNICAL DATA SHEET

AR-15 CONVERSION

Identifiers

Calibre (UTM Ammunition): .223 / 5.56mm

Origin: [United Kingdom/United States](#)

P/N: [01-2523](#)

Gross Package: [Dimensions 10in x 7in x 3in](#)
[Gross Weight 2lb](#)

Compatible UTM Ammunition Types

For use only with UTM 5.56mm/.223" Target Shooting Ammunition.

Conversion Contents

The Conversion consists of a replacement Bolt/Carrier adaptor & conversion manual.

Operational Data

Operation: [Semi-automatic](#).

Feed: [Magazine](#).

Safety Features

- Offset firing pin.
- Non-Locking bolt head; direct blowback only.
- Blue indicators for easy identification the training bolt is installed.

Warranty

UTM warrants that all firearm conversions will be free of defects in design, workmanship and materials, for a period of twenty-four (24) months following the date of delivery.

Guidelines & Warnings

- UTM converted firearms must be fired "clean and dry" in the firearm bore and barrel. NO LUBRICATION IN THE BARREL.
- Keep all ammunition out of reach of children.
- UTM assumes no responsibility for injuries, loss or damage resulting from misuse of this or any of its products.

When converting back to 'Duty' use, ensure that the chamber and bore have been cleaned, cleared of all debris, objects or projectiles and inspected before firing a live round. Failure to ensure that the barrel of the host firearm is free from obstruction could result in damage to the barrel and/or injury to the operator.



European Patent number: 1228342 additional patents pending. US patent numbers: 6253682, 6371028, 6427600, 6095051, 6378439, 6422149, 6415718, 6564719 UTM, Ultimate Training Munitions, and the "Breech" logo design are trademarks belonging to UTM Ltd.



TECHNICAL DATA SHEET

AR-15 CONVERSION KIT (BASIC SHOOTING KIT)

Identifiers

Calibre (UTM Ammunition): .223 / 5.56mm

Origin: [United States](#)

P/N: [01-2519](#)

Gross Package: [Dimensions 11in x 8in x 4in](#)
[Gross Weight 2.5lb](#)

Compatible UTM Ammunition Types

For use only with UTM 5.56mm/.223" Target Shooting Ammunition.

Kit Contents

The Conversion Kit consists of a replacement Bolt/Carrier adaptor, Projectile Puller and Thread Adapter, Magazine, Conversion Manual & 50 Rounds UTM Ammunition.

Operational Data

Operation: [Semi-automatic](#).

Feed: [Magazine](#).

Safety Features

- Offset firing pin.
- Non-Locking bolt head; direct blowback only.
- Blue indicators for easy identification the training bolt is installed.

Warranty

UTM warrants that all firearm conversion kits will be free of defects in design, workmanship and materials, for a period of twenty-four (24) months following the date of delivery.

Guidelines & Warnings

- UTM converted firearms must be fired "clean and dry" in the firearm bore and barrel. NO LUBRICATION IN THE BARREL.
- Keep all ammunition out of reach of children.
- UTM assumes no responsibility for injuries, loss or damage resulting from misuse of this or any of its products.

When converting back to 'Duty' use, ensure that the chamber and bore have been cleaned, cleared of all debris, objects or projectiles and inspected before firing a live round. Failure to ensure that the barrel of the host firearm is free from obstruction could result in damage to the barrel and/or injury to the operator.



European Patent number: 1228342 additional patents pending. US patent numbers: 6253682, 6371028, 6427600, 6095051, 6378439, 6422149, 6415718, 6564719 UTM, Ultimate Training Munitions, and the "Breech" logo design are trademarks belonging to UTM Ltd.



TECHNICAL DATA SHEET

AR-15 CONVERSION KIT (TARGET SHOOTING KIT)

Identifiers

Calibre (UTM Ammunition): .223 / 5.56mm

Origin: [United States](#)

P/N: [01-2599](#)

Gross Package: [Dimensions 14in x 14in x 6in](#)
[Gross Weight 9.5lb](#)

Compatible UTM Ammunition Types

For use only with UTM 5.56mm/.223" Target Shooting Ammunition.

Kit Contents

The Conversion Kit consists of a replacement Bolt/Carrier adaptor, Cleaning Kit, Target, Holder and Steel Projectile Trap, Magazine, Conversion Manual & 50 Rounds UTM Ammunition.

Operational Data

Operation: [Semi-automatic](#).

Feed: [Magazine](#).

Safety Features

- Offset firing pin.
- Non-Locking bolt head; direct blowback only.
- Blue indicators for easy identification the training bolt is installed.

Warranty

UTM warrants that all firearm conversion kits will be free of defects in design, workmanship and materials, for a period of twenty-four (24) months following the date of delivery.

Guidelines & Warnings

- UTM converted firearms must be fired "clean and dry" in the firearm bore and barrel. NO LUBRICATION IN THE BARREL.
- Keep all ammunition out of reach of children.
- UTM assumes no responsibility for injuries, loss or damage resulting from misuse of this or any of its products.

When converting back to 'Duty' use, ensure that the chamber and bore have been cleaned, cleared of all debris, objects or projectiles and inspected before firing a live round. Failure to ensure that the barrel of the host firearm is free from obstruction could result in damage to the barrel and/or injury to the operator.



European Patent number: 1228342 additional patents pending. US patent numbers: 6253682, 6371028, 6427600, 6095051, 6378439, 6422149, 6415718, 6564719 UTM, Ultimate Training Munitions, and the "Breech" logo design are trademarks belonging to UTM Ltd.



TECHNICAL DATA SHEET

BERETTA 92F CONVERSION

Identifiers

Calibre (UTM Ammunition): 9mm
 Origin: United States
 P/N: 01-2988
 Gross Package: Dimensions 10in x 7in x 3in
 Gross Weight 2lb



Compatible UTM Ammunition Types

For use only with UTM 9mm Target Shooting Ammunition.

Conversion Contents

The Conversion consists of a replacement Barrel & Conversion Manual.

Operational Data

Operation: Semi-Automatic.
 Feed: Magazine.

Safety Features

- 'Live Round Lockout'.
- Non-Locking barrel; direct blowback only.
- Blue indicators for easy identification the training barrel is installed.

Warranty

UTM warrants that all firearm conversions will be free of defects in design, workmanship and materials, for a period of twenty-four (24) months following the date of delivery.

Guidelines & Warnings

- UTM converted firearms must be fired "clean and dry" in the firearm bore and barrel. NO LUBRICATION IN THE BARREL.
- Keep all ammunition out of reach of children.
- UTM assumes no responsibility for injuries, loss or damage resulting from misuse of this or any of its products.

When converting back to 'Duty' use, ensure that the chamber and bore have been cleaned, cleared of all debris, objects or projectiles and inspected before firing a live round. Failure to ensure that the barrel of the host firearm is free from obstruction could result in damage to the barrel and/or injury to the operator.

European Patent number: 1228342 additional patents pending. US patent numbers: 6253682, 6371028, 6427600, 6095051, 6378439, 6422149, 6415718, 6564719 UTM, Ultimate Training Munitions, and the "Breech" logo design are trademarks belonging to UTM Ltd.



TECHNICAL DATA SHEET

GLOCK 17 CONVERSION

Identifiers

Calibre (UTM Ammunition): 9mm
 Origin: [United Kingdom/United States](#)
 P/N: [01-2978](#)
 Gross Package: [Dimensions 10in x 7in x 3in](#)
[Gross Weight 2lb](#)



Compatible UTM Ammunition Types

For use only with UTM 9mm Target Shooting Ammunition.

Conversion Contents

The Conversion consists of a replacement Barrel, Slide Assembly, Recoil Spring Assembly & Conversion Manual.

Operational Data

Operation: [Semi-Automatic](#).
 Feed: [Magazine](#).

Safety Features

- 'Live Round Lockout'.
- Non-Locking barrel; direct blowback only.
- Blue indicators for easy identification the training barrel is installed.

Warranty

UTM warrants that all firearm conversions will be free of defects in design, workmanship and materials, for a period of twenty-four (24) months following the date of delivery.

Guidelines & Warnings

- UTM converted firearms must be fired "clean and dry" in the firearm bore and barrel. NO LUBRICATION IN THE BARREL.
- Keep all ammunition out of reach of children.
- UTM assumes no responsibility for injuries, loss or damage resulting from misuse of this or any of its products.

When converting back to 'Duty' use, ensure that the chamber and bore have been cleaned, cleared of all debris, objects or projectiles and inspected before firing a live round. Failure to ensure that the barrel of the host firearm is free from obstruction could result in damage to the barrel and/or injury to the operator.

European Patent number: 1228342 additional patents pending. US patent numbers: 6253682, 6371028, 6427600, 6095051, 6378439, 6422149, 6415718, 6564719 UTM, Ultimate Training Munitions, and the "Breech" logo design are trademarks belonging to UTM Ltd.



TECHNICAL DATA SHEET

H&K USP COMPACT CONVERSION

Identifiers

Calibre (UTM Ammunition): 9mm
 Origin: [United Kingdom/United States](#)
 P/N: [01-2983](#)
 Gross Package: [Dimensions 10in x 7in x 3in](#)
[Gross Weight 2lb](#)



Compatible UTM Ammunition Types

For use only with UTM 9mm Target Shooting Ammunition.

Conversion Contents

The Conversion consists of a replacement Barrel, Recoil Spring Assembly & Conversion Manual.

Operational Data

Operation: [Semi-Automatic](#).
 Feed: [Magazine](#).

Safety Features

- 'Live' Round Lockout.
- Non-Locking barrel; direct blowback only.
- Blue indicators for easy identification the training barrel is installed.

Warranty

UTM warrants that all firearm conversions will be free of defects in design, workmanship and materials, for a period of twenty-four (24) months following the date of delivery.

Guidelines & Warnings

- UTM converted firearms must be fired "clean and dry" in the firearm bore and barrel. NO LUBRICATION IN THE BARREL.
- Keep all ammunition out of reach of children.
- UTM assumes no responsibility for injuries, loss or damage resulting from misuse of this or any of its products.

When converting back to 'Duty' use, ensure that the chamber and bore have been cleaned, cleared of all debris, objects or projectiles and inspected before firing a live round. Failure to ensure that the barrel of the host firearm is free from obstruction could result in damage to the barrel and/or injury to the operator.

European Patent number: 1228342 additional patents pending. US patent numbers: 6253682, 6371028, 6427600, 6095051, 6378439, 6422149, 6415718, 6564719 UTM, Ultimate Training Munitions, and the "Breech" logo design are trademarks belonging to UTM Ltd.



TECHNICAL DATA SHEET

SIG 226 CONVERSION

Identifiers

Calibre (UTM Ammunition): [9mm](#)
 Origin: [United Kingdom/United States](#)
 P/N: [01-2994](#)
 Gross Package: [Dimensions 10in x 7in x 3in](#)
[Gross Weight 2lb](#)



Compatible UTM Ammunition Types

For use only with UTM 9mm Target Shooting Ammunition.

Conversion Contents

The Conversion consists of a replacement Barrel Assembly & Conversion Manual.

Operational Data

Operation: [Semi-Automatic](#).
 Feed: [Magazine](#).

Safety Features

- 'Live Round Lockout'.
- Non-Locking barrel; direct blowback only.
- Blue indicators for easy identification the training barrel is installed.

Warranty

UTM warrants that all firearm conversions will be free of defects in design, workmanship and materials, for a period of twenty-four (24) months following the date of delivery.

Guidelines & Warnings

- UTM converted firearms must be fired "clean and dry" in the firearm bore and barrel. NO LUBRICATION IN THE BARREL.
- Keep all ammunition out of reach of children.
- UTM assumes no responsibility for injuries, loss or damage resulting from misuse of this or any of its products.

When converting back to 'Duty' use, ensure that the chamber and bore have been cleaned, cleared of all debris, objects or projectiles and inspected before firing a live round. Failure to ensure that the barrel of the host firearm is free from obstruction could result in damage to the barrel and/or injury to the operator.

European Patent number: 1228342 additional patents pending. US patent numbers: 6253682, 6371028, 6427600, 6095051, 6378439, 6422149, 6415718, 6564719 UTM, Ultimate Training Munitions, and the "Breech" logo design are trademarks belonging to UTM Ltd.



TECHNICAL DATA SHEET

SIG 226 .40CAL CONVERSION

Identifiers

Calibre (UTM Ammunition): 9mm
 Origin: [United Kingdom/United States](#)
 P/N: [01-3286](#)
 Gross Package: [Dimensions 10in x 7in x 3in](#)
[Gross Weight 2lb](#)



Compatible UTM Ammunition Types

For use only with UTM 9mm Target Shooting Ammunition.

Conversion Contents

The Conversion consists of a replacement Barrel Assembly, Recoil Spring, Extractor Claw, One Magazine & Conversion Manual.

Operational Data

Operation: [Semi-Automatic](#).
 Feed: [Magazine](#).

Safety Features

- 'Live Round Lockout'.
- Non-Locking barrel; direct blowback only.
- Blue indicators for easy identification the training barrel is installed.

Warranty

UTM warrants that all firearm conversions will be free of defects in design, workmanship and materials, for a period of twenty-four (24) months following the date of delivery.

Guidelines & Warnings

- UTM converted firearms must be fired "clean and dry" in the firearm bore and barrel. NO LUBRICATION IN THE BARREL.
- Keep all ammunition out of reach of children.
- UTM assumes no responsibility for injuries, loss or damage resulting from misuse of this or any of its products.

When converting back to 'Duty' use, ensure that the chamber and bore have been cleaned, cleared of all debris, objects or projectiles and inspected before firing a live round. Failure to ensure that the barrel of the host firearm is free from obstruction could result in damage to the barrel and/or injury to the operator.

European Patent number: 1228342 additional patents pending. US patent numbers: 6253682, 6371028, 6427600, 6095051, 6378439, 6422149, 6415718, 6564719 UTM, Ultimate Training Munitions, and the "Breech" logo design are trademarks belonging to UTM Ltd.




TECHNICAL DATA SHEET

SIG 229 CONVERSION

Identifiers

Calibre (UTM Ammunition): 9mm
 Origin: [United Kingdom/United States](#)
 P/N: [01-2993](#)
 Gross Package: [Dimensions 10in x 7in x 3in](#)
[Gross Weight 2lb](#)

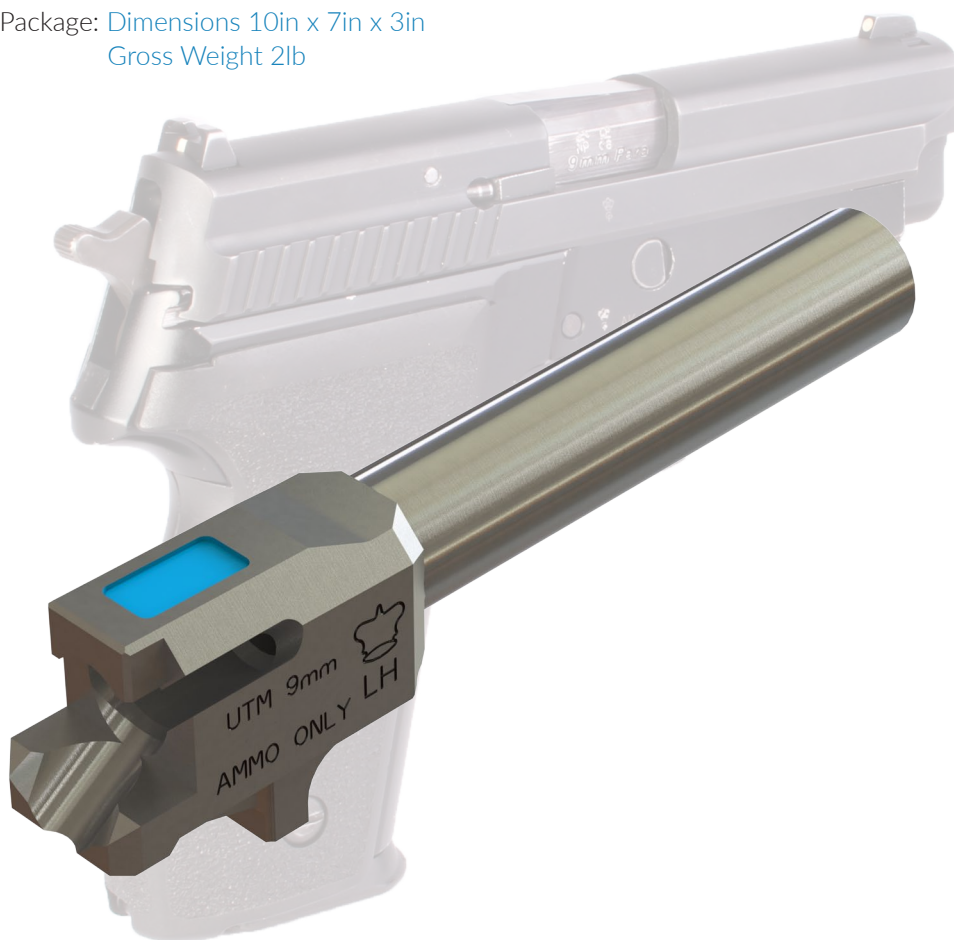

Compatible UTM Ammunition Types

For use only with UTM 9mm Target Shooting Ammunition.

Conversion Contents

The Conversion consists of a replacement Barrel Assembly & Conversion Manual.

Operational Data

Operation: [Semi-Automatic](#).
 Feed: [Magazine](#).

Safety Features

- 'Live Round Lockout'.
- Non-Locking barrel; direct blowback only.
- Blue indicators for easy identification the training barrel is installed.

Warranty

UTM warrants that all firearm conversions will be free of defects in design, workmanship and materials, for a period of twenty-four (24) months following the date of delivery.

Guidelines & Warnings

- UTM converted firearms must be fired "clean and dry" in the firearm bore and barrel. NO LUBRICATION IN THE BARREL.
- Keep all ammunition out of reach of children.
- UTM assumes no responsibility for injuries, loss or damage resulting from misuse of this or any of its products.

When converting back to 'Duty' use, ensure that the chamber and bore have been cleaned, cleared of all debris, objects or projectiles and inspected before firing a live round. Failure to ensure that the barrel of the host firearm is free from obstruction could result in damage to the barrel and/or injury to the operator.

European Patent number: 1228342 additional patents pending. US patent numbers: 6253682, 6371028, 6427600, 6095051, 6378439, 6422149, 6415718, 6564719 UTM, Ultimate Training Munitions, and the "Breech" logo design are trademarks belonging to UTM Ltd.



TECHNICAL DATA SHEET

S&W M&P .40CAL CONVERSION

Identifiers

Calibre (UTM Ammunition): 9mm
 Origin: [United Kingdom/United States](#)
 P/N: [01-3287](#)
 Gross Package: [Dimensions 10in x 7in x 3in](#)
[Gross Weight 2lb](#)



Compatible UTM Ammunition Types

For use only with UTM 9mm Target Shooting Ammunition.

Conversion Contents

The Conversion consists of a replacement Barrel, Slide Assembly, One Magazine & Conversion Manual.

Operational Data

Operation: [Semi-Automatic](#).
 Feed: [Magazine](#).

Safety Features

- 'Live Round Lockout'.
- Non-Locking barrel; direct blowback only.
- Blue indicators for easy identification the training barrel is installed.

Warranty

UTM warrants that all firearm conversions will be free of defects in design, workmanship and materials, for a period of twenty-four (24) months following the date of delivery.

Guidelines & Warnings

- UTM converted firearms must be fired "clean and dry" in the firearm bore and barrel. NO LUBRICATION IN THE BARREL.
- Keep all ammunition out of reach of children.
- UTM assumes no responsibility for injuries, loss or damage resulting from misuse of this or any of its products.

When converting back to 'Duty' use, ensure that the chamber and bore have been cleaned, cleared of all debris, objects or projectiles and inspected before firing a live round. Failure to ensure that the barrel of the host firearm is free from obstruction could result in damage to the barrel and/or injury to the operator.

European Patent number: 1228342 additional patents pending. US patent numbers: 6253682, 6371028, 6427600, 6095051, 6378439, 6422149, 6415718, 6564719 UTM, Ultimate Training Munitions, and the "Breech" logo design are trademarks belonging to UTM Ltd.